

Powerful, maintenance-free 3-phase AC technology

Electronically-controlled lift motor for precise lifting and lowering

Shock-absorbing platform with side arms (optional)

Comfortable steering with electrical tiller and curveCONTROL

Flexible design with fork-over or straddle baseleg options to suit virtually every application

Lithium-ion battery for short charging times and longer service life (optional)



## ERC 212 - 220 & ERC 212b - 220b

**Fork-over and straddle stand-on stacker (2,600 - 4,400 lbs.)**

The efficient and versatile Jungheinrich® ERC and ERC b electric stackers are particularly well-suited for the economic transport of goods over medium to long distances. They are also ideal for stacking and retrieval operations on higher racking levels up to 19.7". With a foldable stand-on platform, optional support arm lift and both fork-over and straddle version design, these trucks provide excellent flexibility.

The ERC's and ERC b's ground clearance allows them to effectively travel over ramps or uneven surfaces. The additional support arm lift (optional) allows for the transport of two pallets simultaneously, further increasing productivity and operational throughput. With fork-over and straddle baseleg options available, customers can handle both Euro pallets and Grocery Manufacturers Association (GMA) pallets effectively and efficiently. The robust and precise lift motor allows for gentle lifting and lowering of loads.

The ERC and ERC b trucks are also available with Lithium-ion technology. This provides customers with more run time and shorter charging times. No battery exchange is required and there is no build-up of gas. Longer service life and zero maintenance, compared to lead-acid batteries, provide additional cost savings in both the short and long-term. Furthermore, with Lithium-ion, no charging rooms with ventilation are required,

\*The product shown may be different than the actual configuration based on market requirements.

**JUNGHEINRICH®**

Technical data

Characteristics	1.1	Manufacturer			Jungheinrich		Jungheinrich		Jungheinrich		Jungheinrich	
	1.2	Model			ERC 212		ERC 212b		ERC 214		ERC 214b	
	1.3	Drive			electric		electric		electric		electric	
	1.4	Type of operation			pedestrian / ride-on		pedestrian / ride-on		pedestrian / ride-on		pedestrian / ride-on	
	1.5	Load capacity / rated load	Q	lb / kg	2,600	1,200	2,600	1,200	3,000	1,400	3,000	1,400
	1.6	Load center distance	c	in / mm	24	600	24	600	24	600	24	600
	1.8	Load distance, center of drive axle to fork	x	in / mm	25.4	646	27.7	703	25.4	646	26.3	668
	1.9	Wheelbase	y	in / mm	49.8	1,264	52.7	1,339	49.8	1,264	55.6	1,411
	2.1	Service weight (including battery)		lb / kg	2,491	1,130	2,579	1,170	2,646	1,200	2,679	1,215
Weights	2.2	Axle load – with load, front / rear		lb / kg	1,962 / 3,175	890 / 1,440	1,984 / 3,241	900 / 1,470	2,116 / 3,616	960 / 1,640	2,028 / 3,814	920 / 1,730
	2.3	Axle load – unloaded, front / rear		lb / kg	1,830 / 661	830 / 300	1,830 / 750	830 / 340	1,940 / 705	880 / 320	1,874 / 882	850 / 400
	3.1	Tires			Vulkollan		Vulkollan		Vulkollan		Vulkollan	
Wheels, Chassis	3.2	Tire size, front			Ø 230 x 77		Ø 230 x 77		Ø 230 x 77		Ø 230 x 77	
	3.3	Tire size, rear			Ø 85 x 110 / 85		Ø 85 x 75		Ø 85 x 110 / 85		Ø 85 x 75	
	3.4	Additional wheels (dimensions)			Ø 140 x 54		Ø 140 x 54		Ø 140 x 54		Ø 140 x 54	
	3.5	Wheels – number, front / rear (x=driven)			1x +1/2		1x + 1/4		1x +1/2		1x + 1/4	
	3.6	Tread width, front	b <sub>10</sub>	in / mm	20.3	515	20.3	515	20.3	515	20.3	515
	3.7	Tread width, rear	b <sub>11</sub>	in / mm	15.7	400	39.4	1,000	15.7	400	39.4	1,000
	4.2	Mast height (lowered)		h <sub>1</sub> in / mm	76.8	1,950	76.8	1,950	76.8	1,950	76.8	1,950
Dimensions	4.3	Free lift		h <sub>2</sub> in / mm	3.9	100	3.9	100	3.9	100	3.9	100
	4.4	Maximum fork height		h <sub>3</sub> in / mm	185	4,699	185	4,699	236	5,994	211	5,359
	4.5	Extended mast height		h <sub>4</sub> in / mm	132.9	3,375	136.6	3,470	132.9	3,375	136.6	3,470
	4.9	Height of tiller in drive position – minimum / maximum		h <sub>14</sub> in / mm	46.1 / 54.7	1,170 / 1,390	46.1 / 54.7	1,170 / 1,390	46.1 / 54.7	1,170 / 1,390	46.1 / 54.7	1,170 / 1,390
	4.19	Overall length		l <sub>1</sub> in / mm	77.0	1,955	79.9	2,030	77.8	1,976	79.9	2,123
	4.20	Length – including fork shank		l <sub>2</sub> in / mm	31.7	805	34.6	880	32.5	826	38.3	973
	4.21	Overall width		b <sub>1</sub> / b <sub>2</sub> in / mm	31.5	800	43.3	1,100	31.5	800	43.3	1,100
	4.22	Fork dimensions, thickness / width / length		in / mm	2.2 / 7.3 / 45.2	56 / 185 / 1,150	1.5 / 3.9 / 45.3	40 / 100 / 1,150	2.2 / 7.3 / 45.2	56 / 185 / 1,150	1.5 / 3.9 / 45.3	40 / 100 / 1,150
	4.25	Width across forks		b <sub>5</sub> in / mm	22.4	570	31.5	800	22.4	570	31.5	800
	4.32	Ground clearance, center wheelbase		m <sub>2</sub> in / mm	1.1	28	2.0	50	1.1	28	2.0	50
	4.33	Aisle width for pallets 48" X 40" lengthwise <sup>6)</sup>		Ast in / mm	97.6	2,480	94.8	2,408	98.5	2,501	98.7	2,506
	4.34	Aisle width for pallets 40" X 48" crossways <sup>6)</sup>		Ast in / mm	95.1	2,416	93.6	2,378	95.9	2,437	96.6	2,454
	4.35	Turning radius		Wa in / mm	62.9	1,597	61.8	1,570	63.7	1,618	64.6	1,640
Performance	5.1	Travel speed, with / without load		mph / km/h	5.6 / 6.8	9 / 11	5.6 / 6.8	9 / 11	5.6 / 6.8	9 / 11	5.6 / 6.8	9 / 11
	5.2	Lift speed, with / without load		f/m / m/s	31.5 / 78.7	0.2 / 0.4	31.5 / 78.7	0.2 / 0.4	39.4 / 59.1	0.2 / 0.3	39.4 / 59.1	0.2 / 0.3
	5.3	Lower speed, with / without load		f/m / m/s	88.6 / 68.9	0.45 / 0.35	88.6 / 68.9	0.45 / 0.35	88.6 / 68.9	0.45 / 0.35	88.6 / 68.9	0.45 / 0.35
	5.8	Maximum gradeability, with / without load		%	10 / 20		10 / 20		10 / 20		10 / 20	
	5.10	Service brake			generative		generative		generative		generative	
Electrical	6.1	Drive motor, rating S <sub>2</sub> 60 minutes		kW	2.8		2.8		2.8		2.8	
	6.2	Lift motor, output with S <sub>3</sub>		kW	3		3		3		3	
	6.3	Battery according to DIN 43531/35/36			DIN 43535 B		DIN 43535 B		DIN 43535 B		DIN 43535 B	
	6.4	Battery voltage / nominal capacity	k <sub>5</sub>	V / Ah	24 / 300		24 / 300		24 / 300		24 / 375	
	6.5	Battery weight		lb / kg	525	238	525	238	525	238	601	273
	6.6.1	Energy consumption according to EN cycle		kWh/h	0.64		0.64		0.76		0.74	
	6.6.2	CO <sub>2</sub> equivalent as per EN 16796		lb/h / kg/h	0.77	0.35	0.77	0.35	0.90	0.41	0.88	0.40
	6.7	Throughput efficiency		t/h	57		57		65		65	
	6.8	Energy consumption with maximum throughput		kWh/h	1.65		1.65		1.64		1.64	
Other	8.1	Type of drive control			AC speedCONTROL		AC speedCONTROL		AC speedCONTROL		AC speedCONTROL	
	8.4	Sound level at driver's ear according to EN 12053		dB(A)	64		64		64		64	

1) Diagonal in accordance with VDI: + 5.4 in (138 mm)  
2) Diagonal in accordance with VDI: + 8.5 in (215 mm)  
3) DZ: x - 1.7 in (42 mm); l1 + 1.7 in (42 mm); l2 + 1.7 in (42 mm)  
4) Other speed versions: 3.6 / 3.6 mph (6.0/6.0 km/h) (standard), and 4.4 / 4.4 mph (7.0/7.0 km/h)  
5) Tandem Ø 3.3 x 3.3 in (85 x 85 mm)  
6) Add 15.5" (393.7mm) when fold-down platform is down

In accordance with VDI Guideline 2198 this specification sheet provides details of the standard truck only. Non-standard tires, different masts, optional equipment, etc. may result in different values.


ERC 212/214/216 data of battery compartment M-VBE; hoist frame ZT2800/2900; equipment: drivePLUS - 1.8: For DZ-mast: x - 42 mm - 3.3: Tandem: Ø85 x 85 mm - 4.19: For DZ-mast: l1 + 42 mm; for battery compartment L-VBE or L-SBE: l1 + 72 mm - 4.20: For DZ-mast: l2 + 42 mm; for battery compartment L-VBE or L-SBE: l2 + 72 mm - 4.33: Diagonal as per VDI: Ast + 215 mm; for battery compartment L-VBE or L-SBE: Ast + 72 mm - 4.34: Diagonal as per VDI: Ast + 138 mm; for battery compartment L-VBE or L-SBE: Ast + 72 mm - 5.1: For equipment Efficiency without restraint system: 6.0/6.0 km/h; with restraint system: 7.0/7.0 km/h - 5.8: For equipment Efficiency: ERC 212: 10/16 %; ERC 214: 09/16 %; ERC 216: 08/16 % - 6.6: For equipment Efficiency: ERC 212: 0.63 kWh/h; ERC 214: 0.81 kWh/h; ERC 216: 0.86 kWh/h - 6.7: For equipment Efficiency: ERC 212: 56 t/h; ERC 214: 64 t/h; ERC 216: 71 t/h - 6.8: For equipment Efficiency: ERC 212: 1.63 kWh/h; ERC 214: 1.65 kWh/h; ERC 216: 1.67 kWh/h

This specification sheet only provides technical values for the standard truck. Non-standard tires, different masts, additional equipment, etc., could produce other values. Rights reserved for technical changes and improvements.


as of: 08/2021

Jungheinrich ERC 216 electric		Jungheinrich ERC 216b electric		Jungheinrich ERC 220 electric		Jungheinrich ERC 220b electric	
pedestrian / ride-on		pedestrian / ride-on		pedestrian / ride-on		pedestrian / ride-on	
3,500	1,600	3,500	1,600	4,400	2,000	4,400	2,000
24	600	24	600	24	600	24	600
25.4	646	26.3	668	25.4	646	26.3	668
49.8	1,264	55.6	1,411	52.6	1,336	55.6	1,411
2,690	1,220	2,756	1,250	2,901	1,316	2,901	1,316
2,161 /	980 /	2,028 /	920 /	2,167 /	983 /	2,167 /	983 /
4,057	1,840	4,255	1,930	5,141	2,332	5,141	2,332
1,962 /	890 /	1,874 /	850 /	2,037 /	924 /	2,037 /	924 /
728	330	882	400	864	392	864	392
Vulkollan Ø 230 x 77		Vulkollan Ø 230 x 77		Vulkollan Ø 230 x 77		Vulkollan Ø 230 x 77	
Ø 85 x 110 / 85		Ø 85 x 75		Ø 85 x 85		Ø 85 x 75	
Ø 140 x 54		Ø 140 x 54		Ø 140 x 54		Ø 140 x 54	
1x +1/2		1x + 1/4		1x + 1/4		1x + 1/4	
20.3	515	20.3	515	20.3	515	20.3	515
15.7	400	39.4	1,000	15.7	400	39.4	1,000
76.8	1,950	76.8	1,950	82.7	2,100	82.7	2,100
3.9	100	3.9	100	3.9	100	3.9	100
207	5,245	207	5,245	189	4,800	189	4,800
130.9	3,325	136.6	3,370	136.4	3,465	136.4	3,465
46.1 /	1,170 /	46.1 /	1,170 /	46.1 /	1,170 /	46.1 /	1,170 /
54.7	1,390	54.7	1,390	54.7	1,390	54.7	1,390
77.8	1,976	79.9	2,123	80.6	2,048	79.9	2,123
32.5	826	38.3	973	35.4	898	38.3	973
31.5	800	43.3	1,100	31.5	800	43.3	1,100
2.2 /	56 /	1.6 /	40 /	2.2 /	56 /	2.0 /	50 /
7.3 /	185 /	3.9 /	100 /	7.3 /	185 /	5.5 /	140 /
45.2	1,150	45.3	1,150	45.2	1,150	45.3	1,150
22.4	570	31.5	800	22.4	570	31.5	800
1.1	28	2.0	50	0.7	18	1.5	40
98.5	2,501	98.7	2,506	98.5	2,501	98.7	2,506
95.9	2,437	96.6	2,454	95.9	2,437	96.6	2,454
63.7	1,618	64.6	1,640	63.7	1,618	64.6	1,640
5.6 / 6.8	9 / 11	5.6 / 6.8	9 / 11	5.0 / 6.2	8 / 10	5.0 / 6.8	8 / 11
31.5 / 59.1	0.2 / 0.3	31.5 / 59.1	0.2 / 0.3	19.7 / 35.4	0.1 / 0.2	19.7 / 35.4	0.1 / 0.2
88.6 / 68.9	0.45 / 0.35	88.6 / 68.9	0.45 / 0.35	88.6 / 68.9	0.45 / 0.35	88.6 / 68.9	0.45 / 0.35
10 / 20		10 / 20		6 / 16		6 / 20	
generative		generative		generative		generative	
2.8		2.8		2.8		2.8	
3		3		3		3	
DIN 43535 B		DIN 43535 B		DIN 43535 B		DIN 43535 B	
24 / 300		24 / 375		24 / 375		24 / 375	
525	238	601	273	635	288	635	288
0.83		0.83		—	—	—	—
0.99	0.45	0.99	0.45	—	—	—	—
73		73		—	—	—	—
1.65		1.65		—	—	—	—
AC speedCONTROL		AC speedCONTROL		AC speedCONTROL		AC speedCONTROL	
64		64		64		64	

## ERC 212/214/216/220

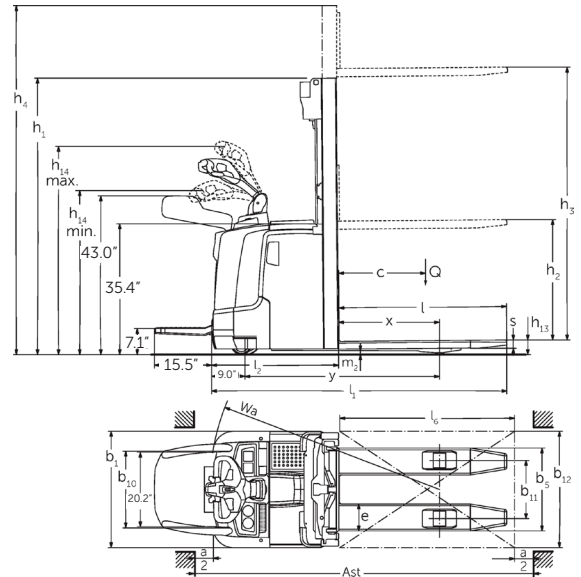

## ERC 212b/214b/216b/220b

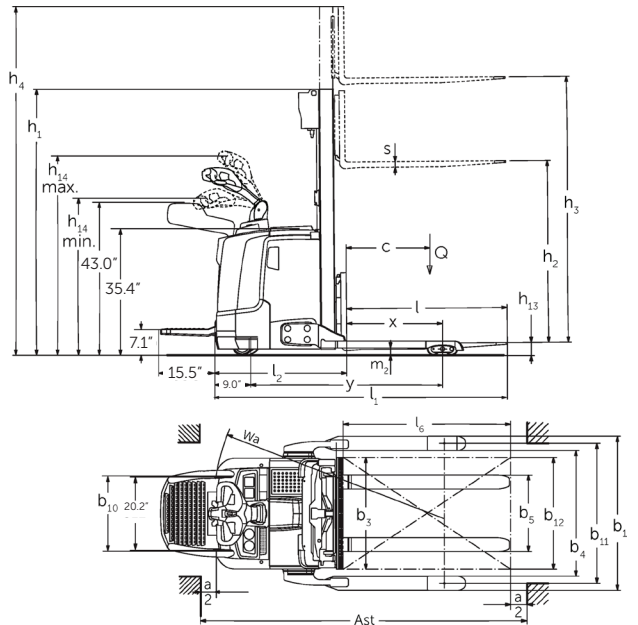

ERC 212b/214b/216b data of battery compartment M-SBE (ERC 212b) or LX-SBE (ERC 214b/216b); hoist frame ZT2800/2900; equipment: drivePLUS - 1.8:  
For DZ-mast: x - 3 mm - 1.9: For lowered wheel arms: x + 54 mm - 4.19: For DZ-mast: l1 + 3 mm - 4.20: For DZ-mast: l2 + 3 mm - 4.21: 1100 mm / 1270 mm / 1470 mm (gerastert nach Spurbreite) - 4.24: Optional: 975 mm available - 4.33: Diagonal as per VDI: Ast + 203 mm / + 203 mm / + 259 mm (sorted by track width) - 4.34: Diagonal as per VDI: Ast + 133 mm / + 133 mm / + 209 mm (sorted by track width) - 5.1: For equipment Efficiency without restraint system: 6.0/6.0 km/h; with restraint system: 7.0/7.0 km/h - 5.8: For equipment Efficiency: ERC 212b: 10/16 %; ERC 214b: 09/16 %; ERC 216b: 08/16 % - 6.6: For equipment Efficiency: ERC 212b: 0.63 kWh/h; ERC 214b: 0.81 kWh/h; ERC 216b: 0.86 kWh/h - 6.7: For equipment Efficiency: ERC 212b: 56 t/h; ERC 214b: 64 t/h; ERC 216b: 71 t/h - 6.8: For equipment Efficiency: ERC 212b: 1.63 kWh/h; ERC 214b: 1.65 kWh/h; ERC 216b: 1.67 kWh/h

# The Jungheinrich Advantage



ERC storage controls and compartment



ERC operator position



Easy-to-operate main connector for on-board charger

## 'Intelligent' control and advanced drive technology

The ERC and ERC b series are equipped with a modern 3-phase AC drive motor, offering you greater performance while simultaneously reducing operating costs. Advantages:

- High level of efficiency with excellent energy management
- Powerful acceleration
- Rapid direction change
- Jungheinrich speedCONTROL – different efficiency modes for different performance levels
- No carbon brushes – maintenance-free drive motor
- Increased drive speed and acceleration with drivePLUS and load-dependent driving behavior

## Flexible operation

Fork-over and straddle designs available for Euro pallets and GMA pallets respectively. Different models for a whole range of applications. Stand-on platform and side arms can be folded in for use in confined applications.

### Version 1:

- 3.7 mph stand-on platform without side-arms

### Version 2:

- 4.3 mph (ERC) / 5.6 mph (ERC b except 220b) stand-on platform with side-arms & fixed support wheel

### Version 3:

- 6.8 mph stand-on platform with side arms & hydraulic support wheel (except 220 & 220b)

## Easy stacking and retrieval

- Intuitive control of all lifting and lowering functions with multifunction tiller head
- Precise and gentle lifting / lowering of loads with speed-controlled hydraulic motor
- Four-wheel concept for excellent load stability

## Comfortable and intuitive operation

- The electric tiller steering is precise and allows for easy steering and fatigue-free operation, even in confined spaces. curveCONTROL monitors steer angle and automatically reduces the speed of the truck when cornering
- The shock-absorbing stand-on platform accommodates uneven surfaces, effectively reducing strain on the operator
- Padded side arms (optional) help ensure a comfortable posture when cornering
- The low platform height helps ensure easy entry / exit

## Long run times / up time

- Side battery extraction option for multi-shift applications
- Integrated, on-board charger (110/120V-30A) for wet-cell batteries and maintenance-free batteries for easy charging at any 230V main socket (optional)

## Robust and productive design

The ERC and ERC b are designed for highly productive applications:

- 0.31" steel chassis
- Enclosed chassis
- Robust mast with high residual capacities
- Additional lift mechanism to raise the support arm lift independently of the forks
- Double-decker transport of 2 pallets simultaneously (optional)

## Additional equipment

- Load guard
- Full or half option bar for additional equipment
- Shorter battery compartment from previous generation for better maneuverability
- US chargers
- easyACCESS softkey (2-inch color display)
- Speed display, load display, battery residual time display
- Floor spots, mirrors, additional storage space, etc.

## Additional features

- Gentle lowering of loads
- Cold store version
- Load backrest options
- Tandem load wheels
- Integrated weighing system
- Power saving functionality
- Lighting/reflector awareness options

## Parts when you need them

Jungheinrich's Parts Fast or Parts Free Guarantee ensures next-business-day delivery by 5:00 PM of all Jungheinrich parts in the United States, or they're free, including freight. For customers in Canada and Mexico, the guarantee ensures shipping of parts within 24 hours from the time the order was placed by the dealer. See your local Jungheinrich dealer for program details.

\* Programs may be subject to change without notice and may vary by region. Please ask your local Jungheinrich dealer for complete terms and conditions.

\*\*The product shown may be different than the actual configuration based on market requirements.